




Product Data Sheet

KX74162

dust filter controls

Up To 16-way Valve Controller

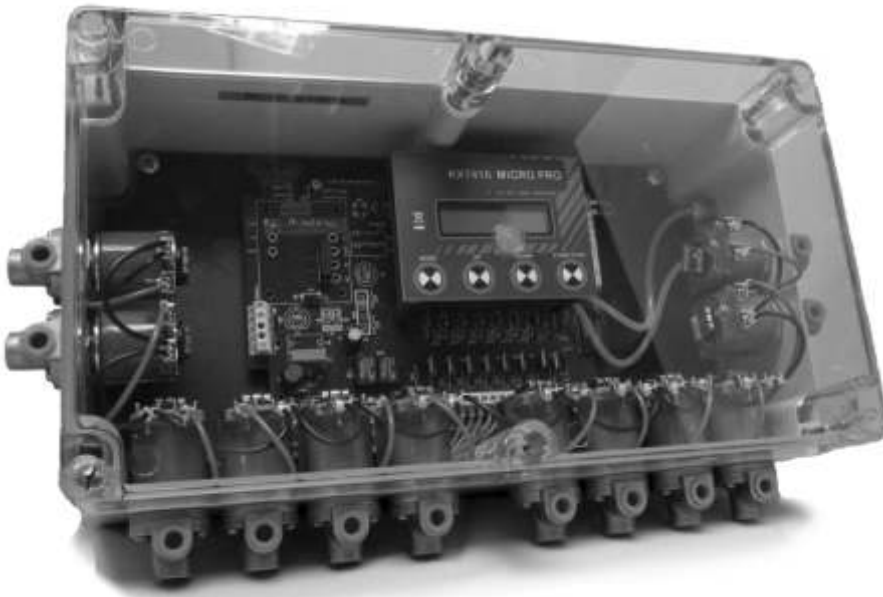

OVERVIEW

- *The **KX** range is designed to serve reverse jet dust extraction systems and formulated specifically to address their needs. The **KX74162 Valve Controller** is a fully self-contained solution to multi-valve control incorporating differential pressure sensing. This unit offers the latest in Microprocessor technology in a compact enclosure, affording unparalleled levels of user friendliness, system flexibility and tamper-proof operation.*
- *The **KX74162 Valve Controller** takes care of system control. Using just four pushbuttons and the high resolution LCD Display, all aspects of system operation can easily be programmed for optimum performance. The **KX74162** is offered as a naked PCD assembly or housed in a robust IP65 rated plastic enclosure - as a reverse jet.*



dust filter controls

Circuit Control Technology
48 Boston Road
Gorse Hill Industrial Estate
Beaumont Leys, Leicester, LE4 1AA
Tel: +44 (0) 116 2998000
Fax: +44 (0) 116 2998001
e-mail: sales@dustfiltercontrols.co.uk

CCT REV XD/04.02.2015

Features

ADVANCED MICRO-PROCESSOR CONTROL .

- Operating at over a million instructions per second the onboard micro-processor provides ease of use and a level of control which was virtually impossible with old plc or Cmos systems.

ONBOARD EPROM MEMORY

- Ensures system settings are retained during power failure or whilst power is turned off.

EASY TO USE 4 BUTTON CONTROL

- **MODE:** Move forward through options
- **UP:** Increases values selected by mode
- **DOWN:** Decreases values selected by mode
- **START/STOP:** Run or halt the system

HIGH RESOLUTION LCD DISPLAY

- Easily view and adjust system setup.
- Displays pressure readings in real time.
- Monitor system status

BUILT-IN DIFFERENTIAL PRESSURE SENSOR

- The KX74162 has it's own internal differential pressure sensor which allows the unit to clean only when needed. This also dispenses with the need for additional external devices.

REAL TIME SYSTEM MONITORING

- While the system is running, Differential Pressure and system status can be monitored in real time. Differential pressure is displayed constantly whenever the Controller is running along with the number of the current valve to be fired during the cleaning sequence. One quick glance at the display will tell the operator the current state of the system and the current position in the cleaning cycle.

BUILT-IN OUTPUT AMPLIFIERS AND POWER SUPPLY

- The unit has it's own internal power supply. Power output to solenoid valves is provided directly from the controller using the internal power amplifiers .

HIGH/LOW PRESSURE ALARMS

- The KX74162 has two relay outputs. These are activated when the differential pressure in the system reaches the user defined settings for a high alarm or low alarm situation.
- The relay outputs may be used to trigger any amount of external events and allow the system malfunction to be handled immediately and effectively. The dual relay system means that high and low pressure events may be handled differently and trigger a separate chain of events to warn of, and handle the situation.
- The units LCD display will carry a warning message if high or low pressure alarm levels are reached.

SEPARATE CLEANING CYCLE FOR SYSTEM FAN STOP

- A separately programmable cleaning cycle is provided for optimum filter performance. This operates whilst the main system fan is not running and can be set to operate for a set number of cycles. It can also be disabled by setting the number of cycles to 0.

Features - contd.

4-20 MILLIAMP OUTPUT

- The unit features a 4-20mA output which may be used to send pressure information to other devices or system controllers. This feature enables the KX74162 to communicate with any device that will accept this type of input and allow integration into virtually any application.

REMOTE CONTROL

- The KX74162 has the facility for remote start/stop. It can be remotely started/stopped via the 5v and REM terminals. The unit is arranged so that the pulsing will start as soon as an open circuit is established across 5v and REM. If the controller is in DP Sensor mode, the remote start/stop facility still functions in conjunction with the Differential Pressure (DP) set points.



dust filter controls

Technical Specifications - KX74162-G10

CONTROLLER:	Part Number KX74162-G10.
INPUT SUPPLY:	24 VDC \pm 10%.
INPUT FUSE:	F3 Axial 2 Amp (T) Time Lag.
INPUT CONNECTIONS:	3-Way 1.5mm 10 Amp side entry plug and socket insulated terminal block which is marked: 0V, 24 VDC.
MAINS FAILURE:	In the event of mains failure, the unit will operate to specification as soon as the voltage level comes within the above limits.
OUTPUT VOLTAGE:	24V DC, regulation as input.
OUTPUT LOAD PER OUTLET:	36W continuous, 44W pulsed into solenoid valves.
I.O. CONNECTIONS:	1.5mm 10 Amp side entry plug and socket insulated terminal block which is marked: 4/20 - 0V, OUT <i>alarms</i> : marked: USER - RL1, RL2 <i>control inputs</i> : marked: CONTROL INPUTS - FAN, REM, 5V, FLO, 5V, <i>valve outputs</i> : marked: VALVE OUTPUTS - COM and 1-16.
DP PRESSURE CONNECTIONS:	2 x 5mm (outside diam) pneumatic compression connectors suitable to accept nylon hose.
START UP SEQUENCE:	The unit is arranged so that it will always start at output 1.
PRESSURE SCALE:	0 - 700mmWG.
CONSTRUCTION:	Solid state microprocessor components mounted onto a double-sided glass fibre P.C.B. with component mask.
INDICATION:	Valve Numbers 1- 16 will be displayed as each output is energised in sequence.
AMBIENT TEMPERATURE AT BOARD SURFACE:	0 to +45 deg.C. Storage Temperature: -10 to +60 deg.C.
VIBRATION SPEC:	Not greater than BEAMA Group 2.
CONDUCTING MATERIALS:	Standard P.C.B's can be supplied with their surfaces coated with a layer of Parylene C, a material that is to MOD standard 59-47/4, and MIL-1-460C. This treatment reduces the risk of damage through moisture.
MICRO-PRO SEQUENCER:	Polycarbonate box with clear Lid. Size 360 x 200 x 150 (E3).

CCT reserve the right to change product specifications at any time with out prior notification and as a consequence of on-going product development.

Technical Specifications - KX74162-G15

CONTROLLER:	Part Number KX74162-G15.
INPUT SUPPLY:	115 - 230 V +10% -15% @ 50/60HZ.
INPUT FUSE:	Fuse 1: 1 Amp 230 V HBC 20mm .
VALVE OUTPUT FUSE:	Fuse 2: 2 Amp 24 V (T) Time Lag.
INPUT CONNECTIONS:	3-Way 1.5mm 10 Amp side entry plug and socket insulated terminal block which is marked: 230, 115, Neut.
MAINS FAILURE:	In the event of mains failure, the unit will operate to specification as soon as the voltage level comes within the above limits.
OUTPUT VOLTAGE:	24V DC, regulated.
OUTPUT LOAD PER OUTLET:	36W continuous, 44W pulsed into solenoid valves.
I.O. CONNECTIONS:	1.5mm 10 Amp side entry plug and socket insulated terminal block which is marked: 4/20 - 0V, OUT <i>alarms</i> : marked: USER - RL1, RL2 <i>control inputs</i> : marked: CONTROL INPUTS - FAN, REM, 5V, FLO, 5V, <i>valve outputs</i> : marked: VALVE OUTPUTS - COM and 1-16.
DP PRESSURE CONNECTIONS:	2 x 5mm (outside diam) pneumatic compression connectors suitable to accept nylon hose.
START UP SEQUENCE:	The unit is arranged so that it will always start at output 1.
PRESSURE SCALE:	0 - 700mmWG.
CONSTRUCTION:	Solid state microprocessor components mounted onto a double-sided glass fibre P.C.B. with component mask.
INDICATION:	Valve Numbers 1- 16 will be displayed as each output is energised in sequence.
AMBIENT TEMPERATURE AT BOARD SURFACE:	0 to +45 deg.C. Storage Temperature: -10 to +60 deg.C.
VIBRATION SPEC:	Not greater than BEAMA Group 2.
CONDUCTING MATERIALS:	Standard P.C.B's can be supplied with their surfaces coated with a layer of Parylene C, a material that is to MOD standard 59-47/4, and MIL-1-460C. This treatment reduces the risk of damage through moisture.
MICRO-PRO SEQUENCER:	Polycarbonate box with clear Lid. Size 360 x 200 x 150 (E3).

CCT reserve the right to change product specifications at any time with out prior notification and as a consequence of on-going product development.

Technical Specifications - KX74162-G4

CONTROLLER:	Part Number KX74162-G4.
INPUT SUPPLY:	115 - 230 V +10% -15% @ 50/60HZ.
INPUT FUSE:	Fuse 1: 1 Amp 230 V HBC 20mm .
VALVE OUTPUT FUSE:	Fuse 2: 1 Amp 110 V HBC 20mm.
INPUT CONNECTIONS:	3-Way 1.5mm 10 Amp side entry plug and socket insulated terminal block which is marked: 230, 115, Neut.
MAINS FAILURE:	In the event of mains failure, the unit will operate to specification as soon as the voltage level comes within the above limits.
OUTPUT VOLTAGE:	110Vac.
OUTPUT LOAD PER OUTLET:	36W continuous, 44W pulsed into solenoid valves.
I.O. CONNECTIONS:	1.5mm 10 Amp side entry plug and socket insulated terminal block which is marked: 4/20 - 0V, OUT <i>alarms</i> : marked: USER - RL1, RL2 <i>control inputs</i> : marked: CONTROL INPUTS - FAN, REM, 5V, FLO, 5V, <i>valve outputs</i> : marked: VALVE OUTPUTS - COM and 1-16.
DP PRESSURE CONNECTIONS:	2 x 5mm (outside diam) pneumatic compression connectors suitable to accept nylon hose.
START UP SEQUENCE:	The unit is arranged so that it will always start at output 1.
PRESSURE SCALE:	0 - 700mmWG.
CONSTRUCTION:	Solid state microprocessor components mounted onto a double-sided glass fibre P.C.B. with component mask.
INDICATION:	Valve Numbers 1- 16 will be displayed as each output is energised in sequence.
AMBIENT TEMPERATURE AT BOARD SURFACE:	0 to +45 deg.C. Storage Temperature: -10 to +60 deg.C.
VIBRATION SPEC:	Not greater than BEAMA Group 2.
CONDUCTING MATERIALS:	Standard P.C.B's can be supplied with their surfaces coated with a layer of Parylene C, a material that is to MOD standard 59-47/4, and MIL-1-460C. This treatment reduces the risk of damage through moisture.
MICRO-PRO SEQUENCER:	Polycarbonate box with clear Lid. Size 360 x 200 x 150 (E3).

CCT reserve the right to change product specifications at any time with out prior notification and as a consequence of on-going product development.


















Technical Specifications - KX74162-G31

CONTROLLER:	Part Number KX74162-G31.
INPUT SUPPLY:	115 - 230 V +10% -15% @ 50/60HZ.
INPUT FUSE:	Fuse 1: 1 Amp 230 V HBC 20mm .
VALVE OUTPUT FUSE:	Fuse 2: 2 Amp 24 V HBC 20mm.
INPUT CONNECTIONS:	3-Way 1.5mm 10 Amp side entry plug and socket insulated terminal block which is marked: 230, 115, Neut.
MAINS FAILURE:	In the event of mains failure, the unit will operate to specification as soon as the voltage level comes within the above limits.
OUTPUT VOLTAGE:	24Vac.
OUTPUT LOAD PER OUTLET:	36W continuous, 44W pulsed into solenoid valves.
I.O. CONNECTIONS:	1.5mm 10 Amp side entry plug and socket insulated terminal block which is marked: 4/20 - 0V, OUT <i>alarms</i> : marked: USER - RL1, RL2 <i>control inputs</i> : marked: CONTROL INPUTS - FAN, REM, 5V, FLO, 5V, <i>valve outputs</i> : marked: VALVE OUTPUTS - COM and 1-16.
DP PRESSURE CONNECTIONS:	2 x 5mm (outside diam) pneumatic compression connectors suitable to accept nylon hose.
START UP SEQUENCE:	The unit is arranged so that it will always start at output 1.
PRESSURE SCALE:	0 - 700mmWG.
CONSTRUCTION:	Solid state microprocessor components mounted onto a double-sided glass fibre P.C.B. with component mask.
INDICATION:	Valve Numbers 1- 16 will be displayed as each output is energised in sequence.
AMBIENT TEMPERATURE AT BOARD SURFACE:	0 to +45 deg.C. Storage Temperature: -10 to +60 deg.C.
VIBRATION SPEC:	Not greater than BEAMA Group 2.
CONDUCTING MATERIALS:	Standard P.C.B's can be supplied with their surfaces coated with a layer of Parylene C, a material that is to MOD standard 59-47/4, and MIL-1-460C. This treatment reduces the risk of damage through moisture.
MICRO-PRO SEQUENCER:	Polycarbonate box with clear Lid. Size 360 x 200 x 150 (E3).

CCT reserve the right to change product specifications at any time with out prior notification and as a consequence of on-going product development.

Programmable features

The following is a flow chart of the programmable settings available on the KX74162 Valve Controller. The options available in each mode are explained in an easy to follow format.

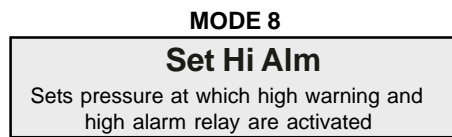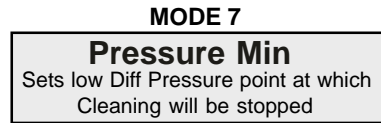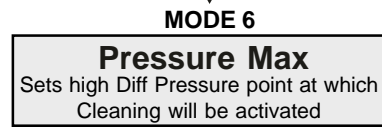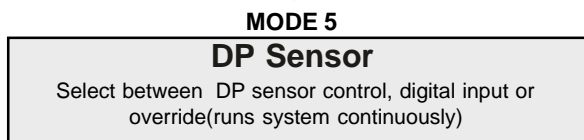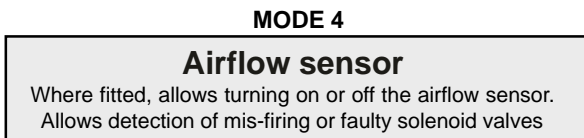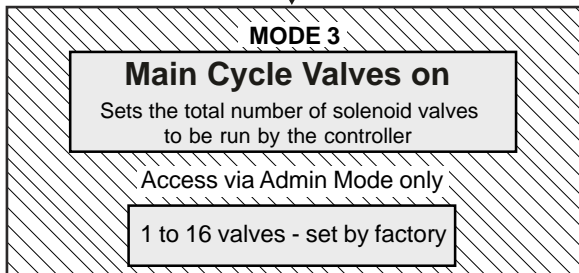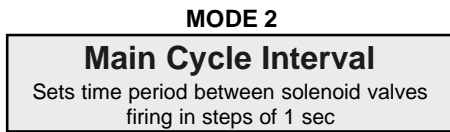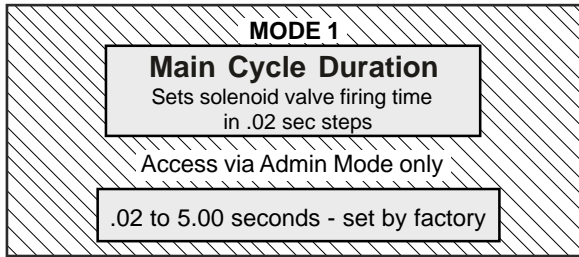

MODES CONTINUE
ON PAGE 9



dust filter controls

Programmable features - contd.

MODE 10

Fan Rundown Cycle Num Cycles

Sets the total number of cleaning cycles initiated by a fan stop period

0 to 15 cycles

MODE 11

Fan Rundown Cycle Interval


Sets time period between solenoid valves firing in steps of 1 sec

1 to 600 seconds



dust filter controls

KX74162-G10 Wiring Diagram

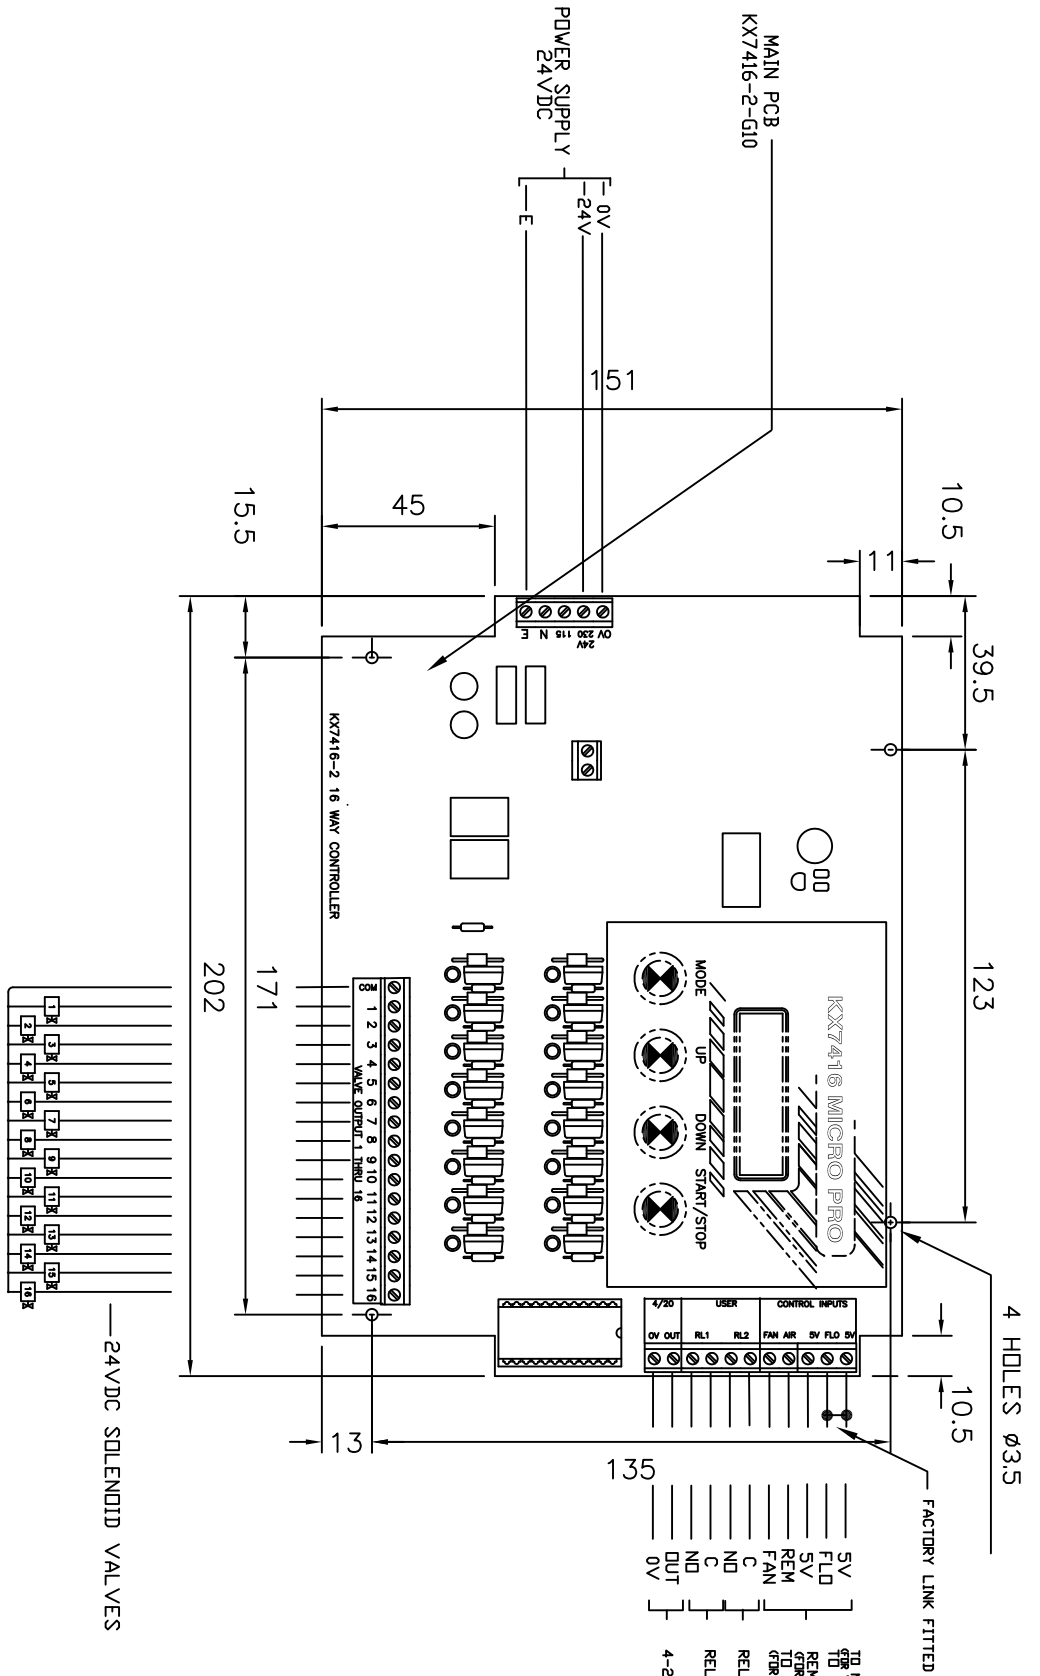

ALL DIMENSIONS IN MILLIMETRES

Circuit Control Technology

48 BOSTON ROAD
 GORSE HILL INDUSTRIAL ESTATE, LEA 11AA
 BEAUMONT LEYS, LEICESTER, LE4 1AA
 Tel: +44 (0) 116 2998000 Fax: +44 (0) 116 2998001

Part No: **KX47162-G10**

Title: **16 WAY MICROPRO SEQUENCE CONTROLLER WIRING DIAGRAM**


Issue	Description	Date
B	REMOTE CONTROL ADDED	06.06.14
A	REDRAWN FROM KX74160A	06.07.12

Drawn: LOF 05.07.12
 Chkd: / /
 Appd: / /

THIS DRAWING IS THE COPYRIGHT OF CIRCUIT CONTROL TECHNOLOGY. IT MAY NOT BE COPIED, TRANSMITTED NOR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS INTENDED, WITHOUT THEIR WRITTEN PERMISSION.

CADFile: SCC\KX74162\KX7416210WD
 Dwg. No. 7416210WD
 Sheet 1 of 1
 Plot Date: 05.07.12
 Rev. B


KX74162-G15 Wiring Diagram

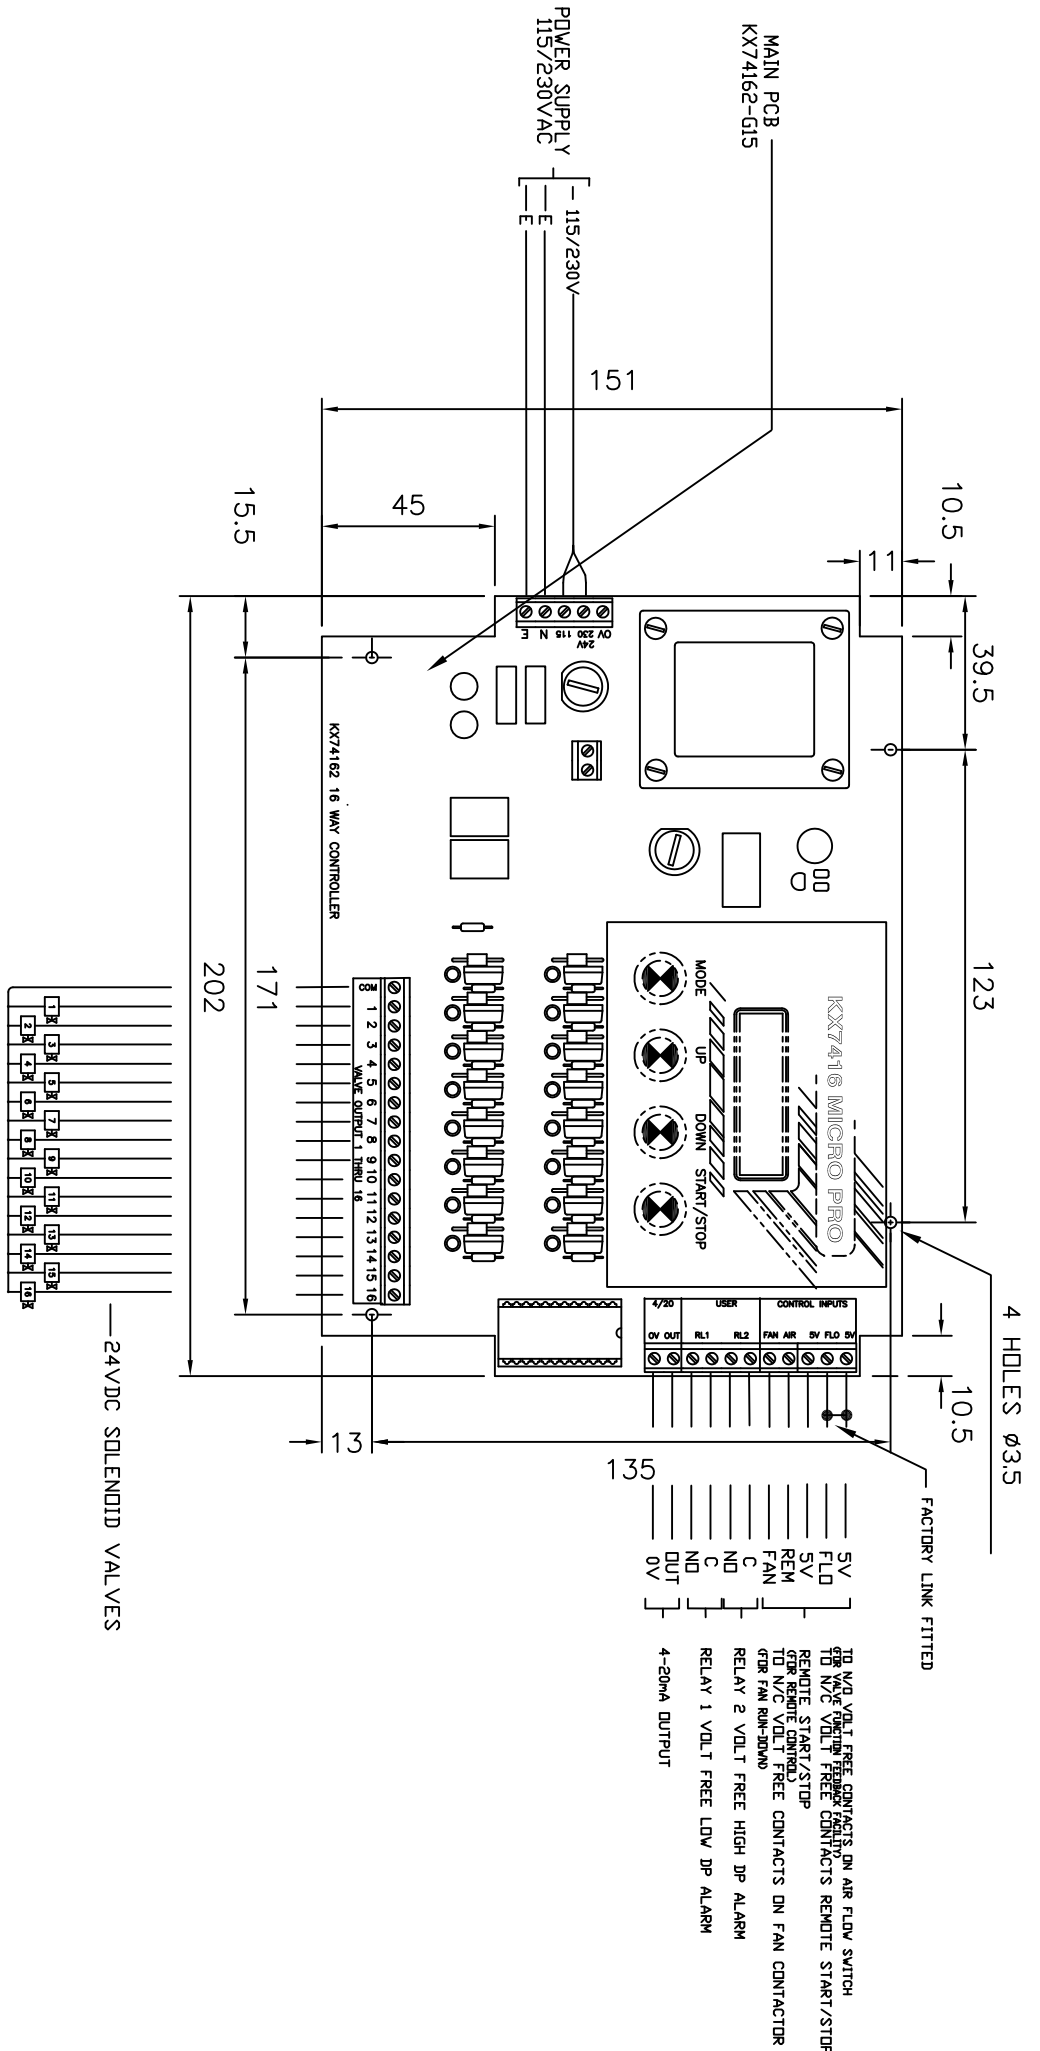

ALL DIMENSIONS IN MILLIMETRES

Circuit Control Technology 48 BOSTON ROAD GORSE HILL INDUSTRIAL ESTATE, LEA 11AA BEAUMONT LEYS, LEICESTER, LE4 1AA Tel: +44 (0) 116 2998000 Fax: +44 (0) 116 2998001	
Part No:	KX47162-G15
Title:	16 WAY MICROPRO SEQUENCE CONTROLLER WIRING DIAGRAM
Issue	Description
A	REPAIRMAN FROM KX74160A
B	REMOTE CONTROL ADDED
Drawn:	LOF 11.07.12
Chkd:	/ /
Appd:	/ /
CADFile:	sc0\KX74162\KX7416215WD
Dwg. No.	7416215WD
Sheet 1 of 1	Rev. B


KX74162-G4 Wiring Diagram

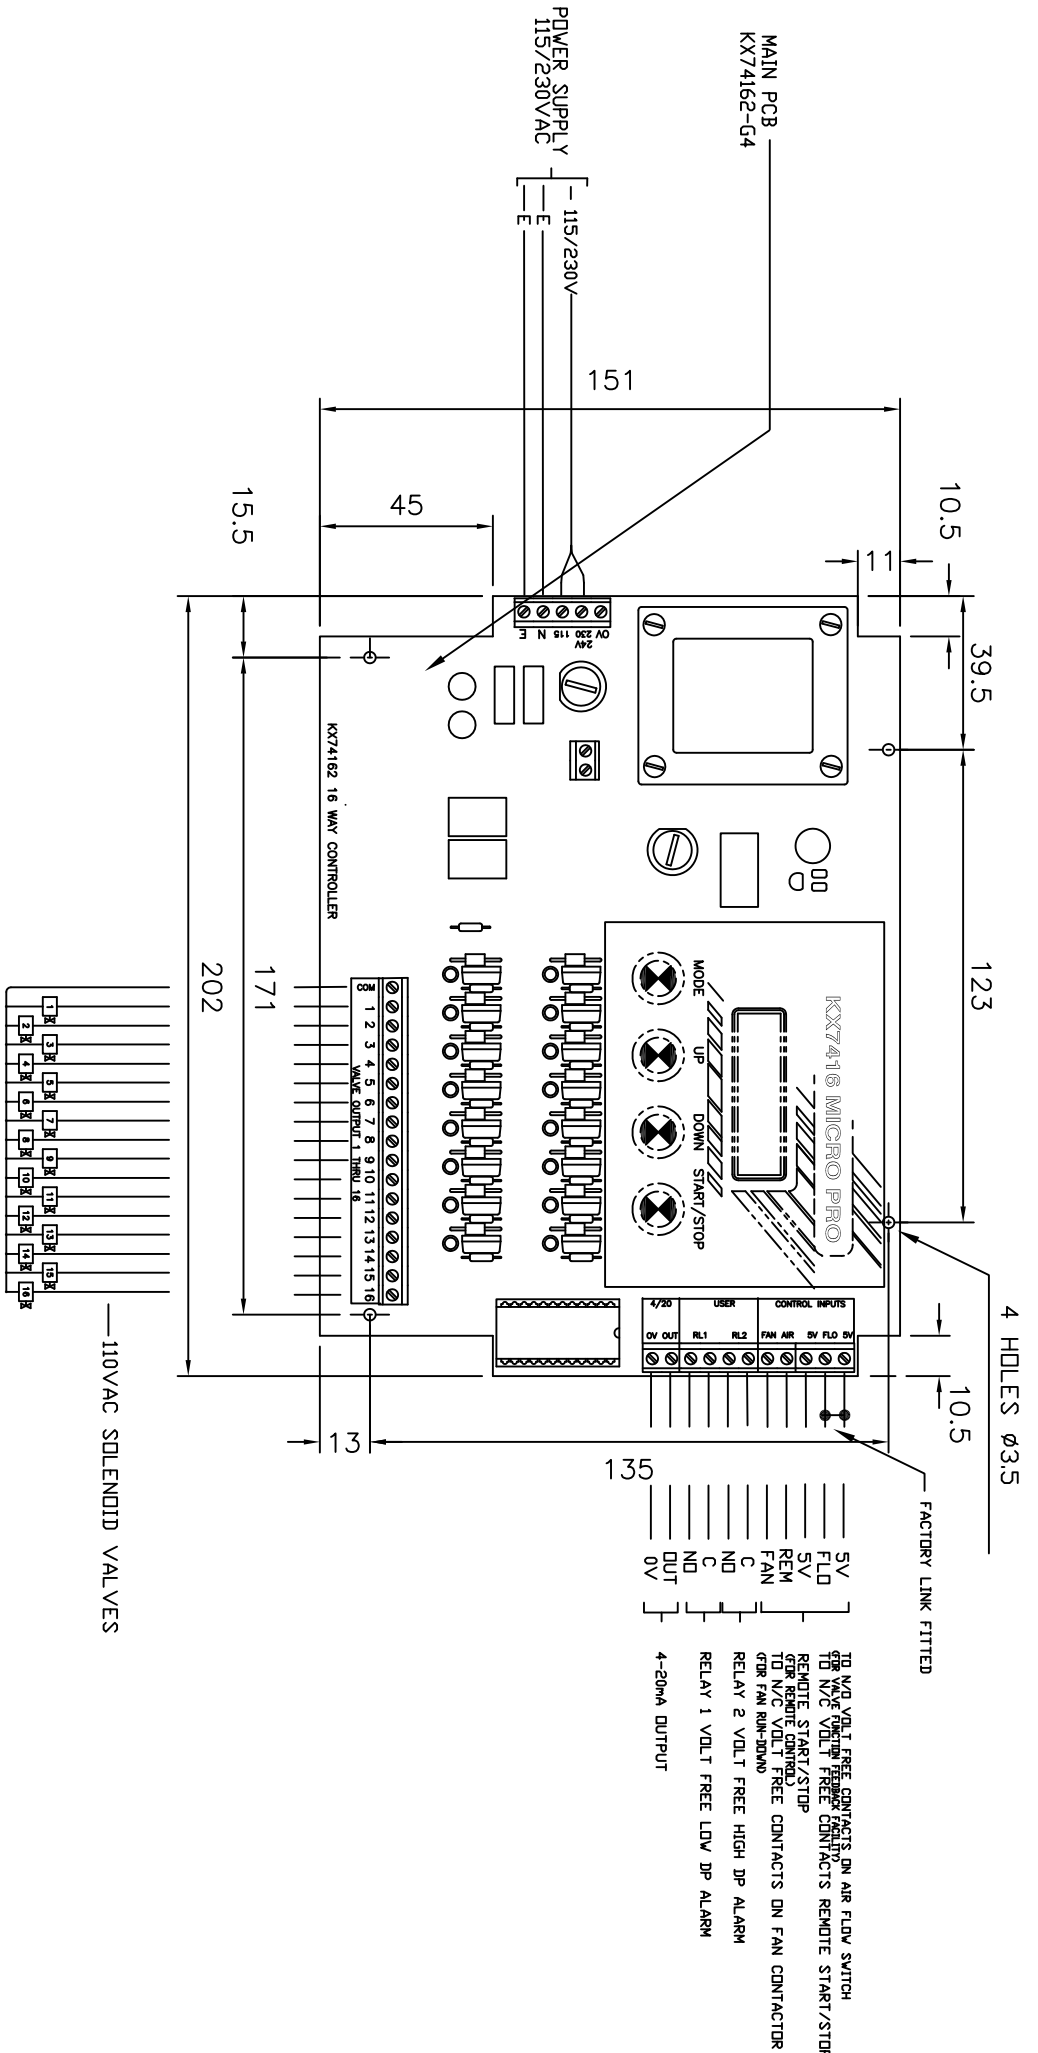

ALL DIMENSIONS IN MILLIMETRES

Circuit Control Technology 48 BOSTON ROAD GORSE HILL INDUSTRIAL ESTATE, BEAUMONT LEYS, LEICESTER, LE4 1AA Tel: +44 (0) 116 2998000 Fax: +44 (0) 116 2998001		Part No: KX47162-G4
Title: MICROPRO 16 WAY SEQUENCE CONTROLLER WIRING DIAGRAM		
Issue A REDRAWN FROM KX74160A	Description REMOTE CONTROL ADDED	Date 11.07.12
Drawn Lof	11.07.12	THIS DRAWING IS THE COPYRIGHT OF CIRCUIT CONTROL TECHNOLOGY. IT MAY NOT BE COPIED, TRANSMITTED NOR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS INTENDED, WITHOUT THEIR WRITTEN PERMISSION.
Appd	Plot Date: 11.07.12	Rev. B
CADFile: SCC\KX74162\KX74162Q4WD	Dwg. No. KX7416204WD	Sheet 1 of 1


KX74162-G31 Wiring Diagram

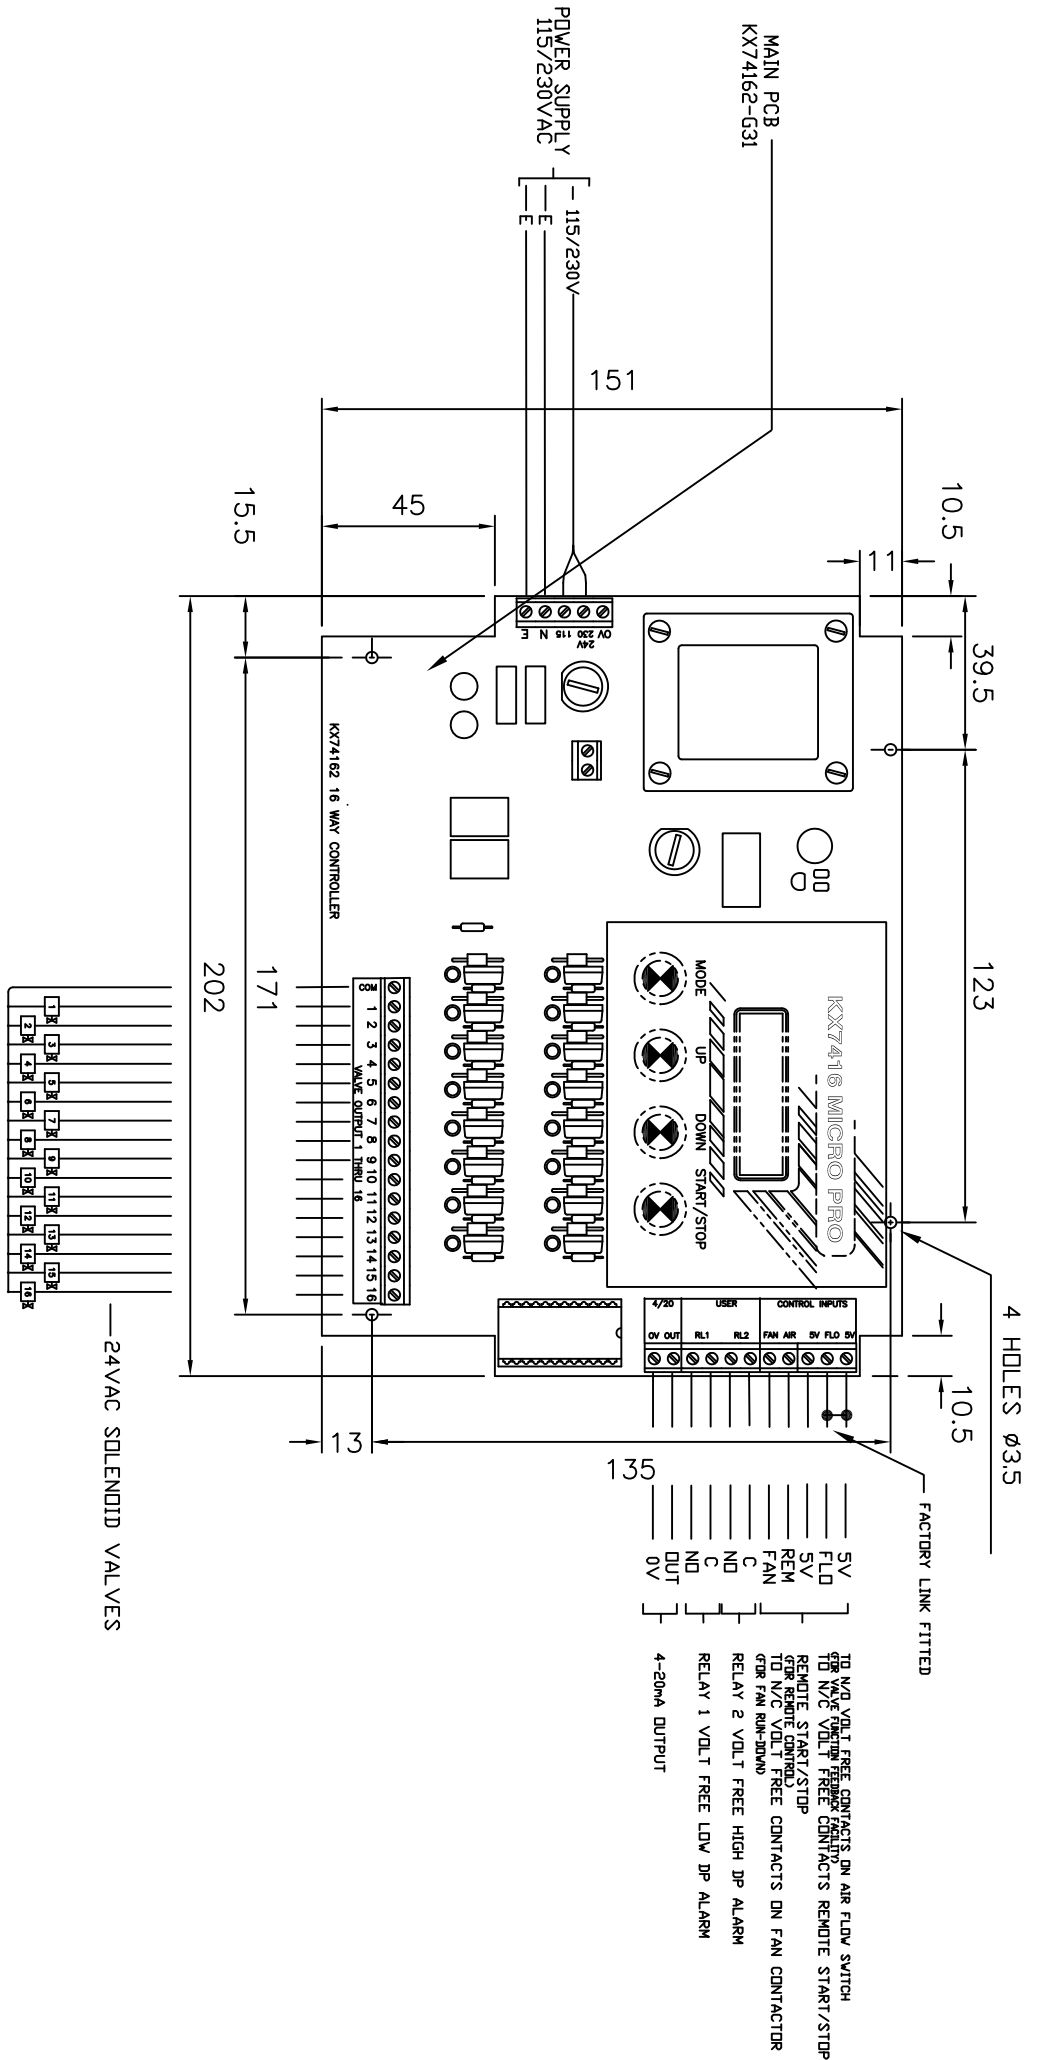

ALL DIMENSIONS IN MILLIMETRES

Circuit Control Technology 48 BOSTON ROAD GORSE HILL INDUSTRIAL ESTATE, LE4 1AA BEAUMONT LEYS, LEICESTER, LE4 1AA Tel: +44 (0) 116 2998000 Fax: +44 (0) 116 2998001	
Part No:	KX47162-G31
Title:	16 WAY MICROPRO SEQUENCE CONTROLLER WIRING DIAGRAM
Drawn:	LOF 11.07.12
Issue:	Remote control added
Appd:	
Checkd:	
CADFile:	sc0\kx74162\kx7416231WD
Dwg. No.:	KX7416231WD
Sheet 1 of 1	Rev. B


KX74162 - As A Sequence Controller

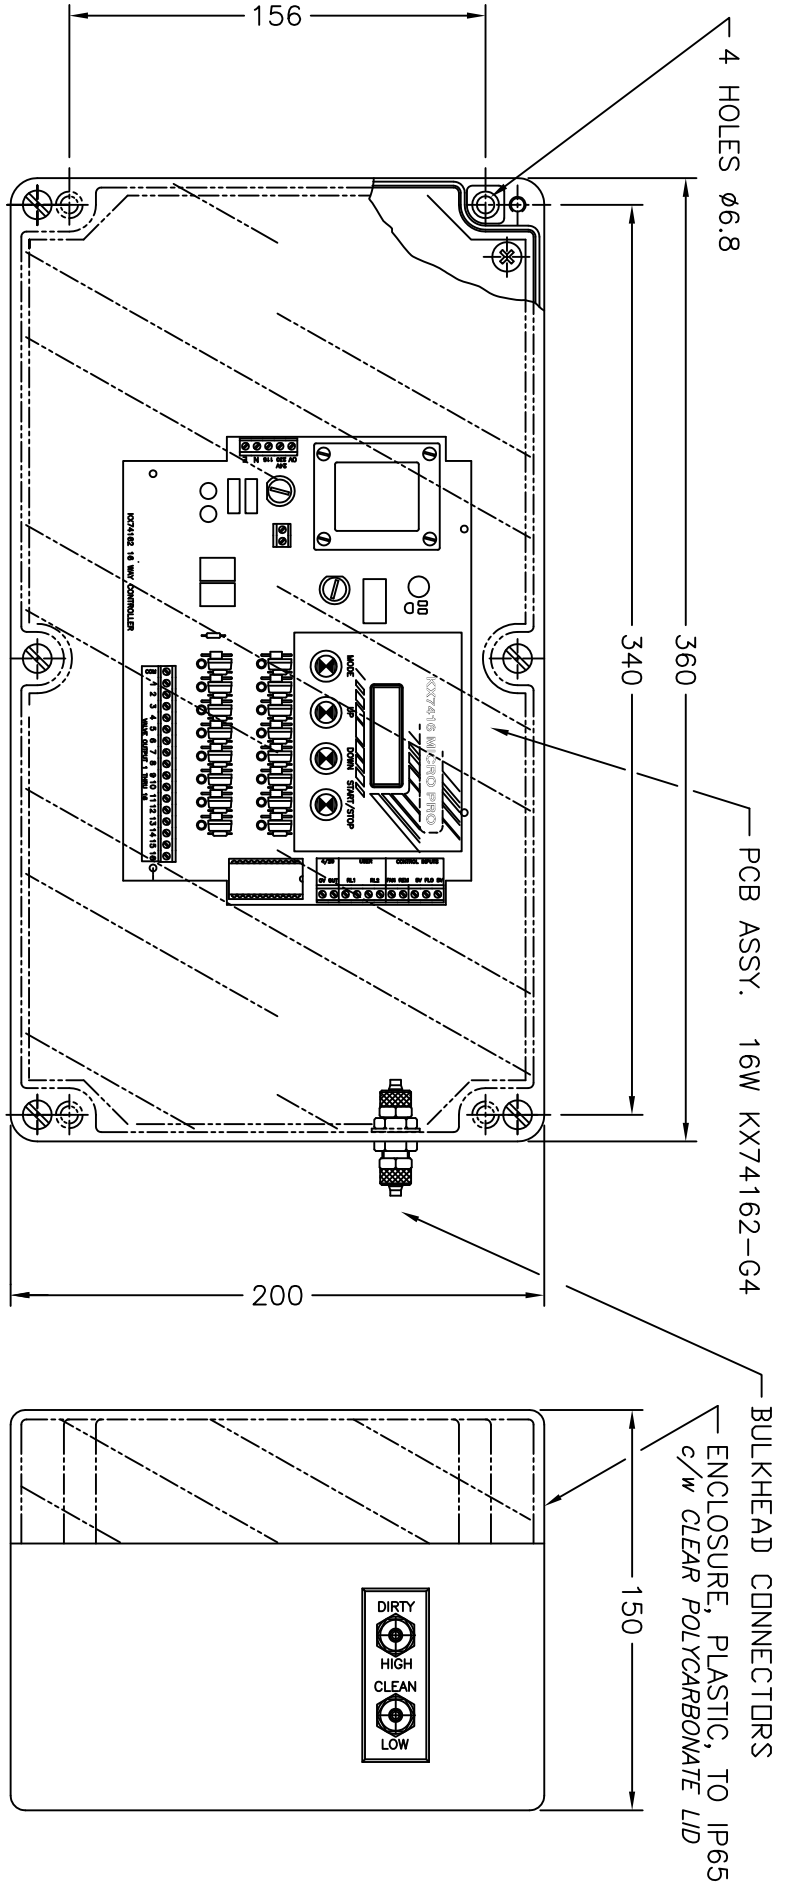

ALL DIMENSIONS IN MILLIMETRES

Circuit Control Technology 48 BOSTON ROAD, GORSE HILL INDUSTRIAL ESTATE, BEAUMONT LEYS, LEICESTER, LE4 1AA Tel: +44 (0) 116 2998000 Fax: +44 (0) 116 2998001		Part No: 16 WAY KX74162-G4E3
Title: UP TO 16 WAY SEQUENCE CONTROLLER GENERAL ARRANGEMENT		
Dwg. No. Sheet 1 of 1	CADFile: SCC\KX74162\SC7416204E3B	Plot Date: 11.07.12
Rev. A	Description THIS DRAWING IS THE COPYRIGHT OF CIRCUIT CONTROL TECHNOLOGY AND IS NOT BE COPIED, TRANSMITTED NOR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS INTENDED, WITHOUT THEIR WRITTEN PERMISSION.	Date 15.10.14 11.07.12
Issue A PRELIMINARY	Description INPUT IDENT CHANGED	Date 11.07.12
Dwn. Chkd. Appd.	Lof / / /	Date 11.07.12 / / /

KX74162 - As A Reverse Jet Station

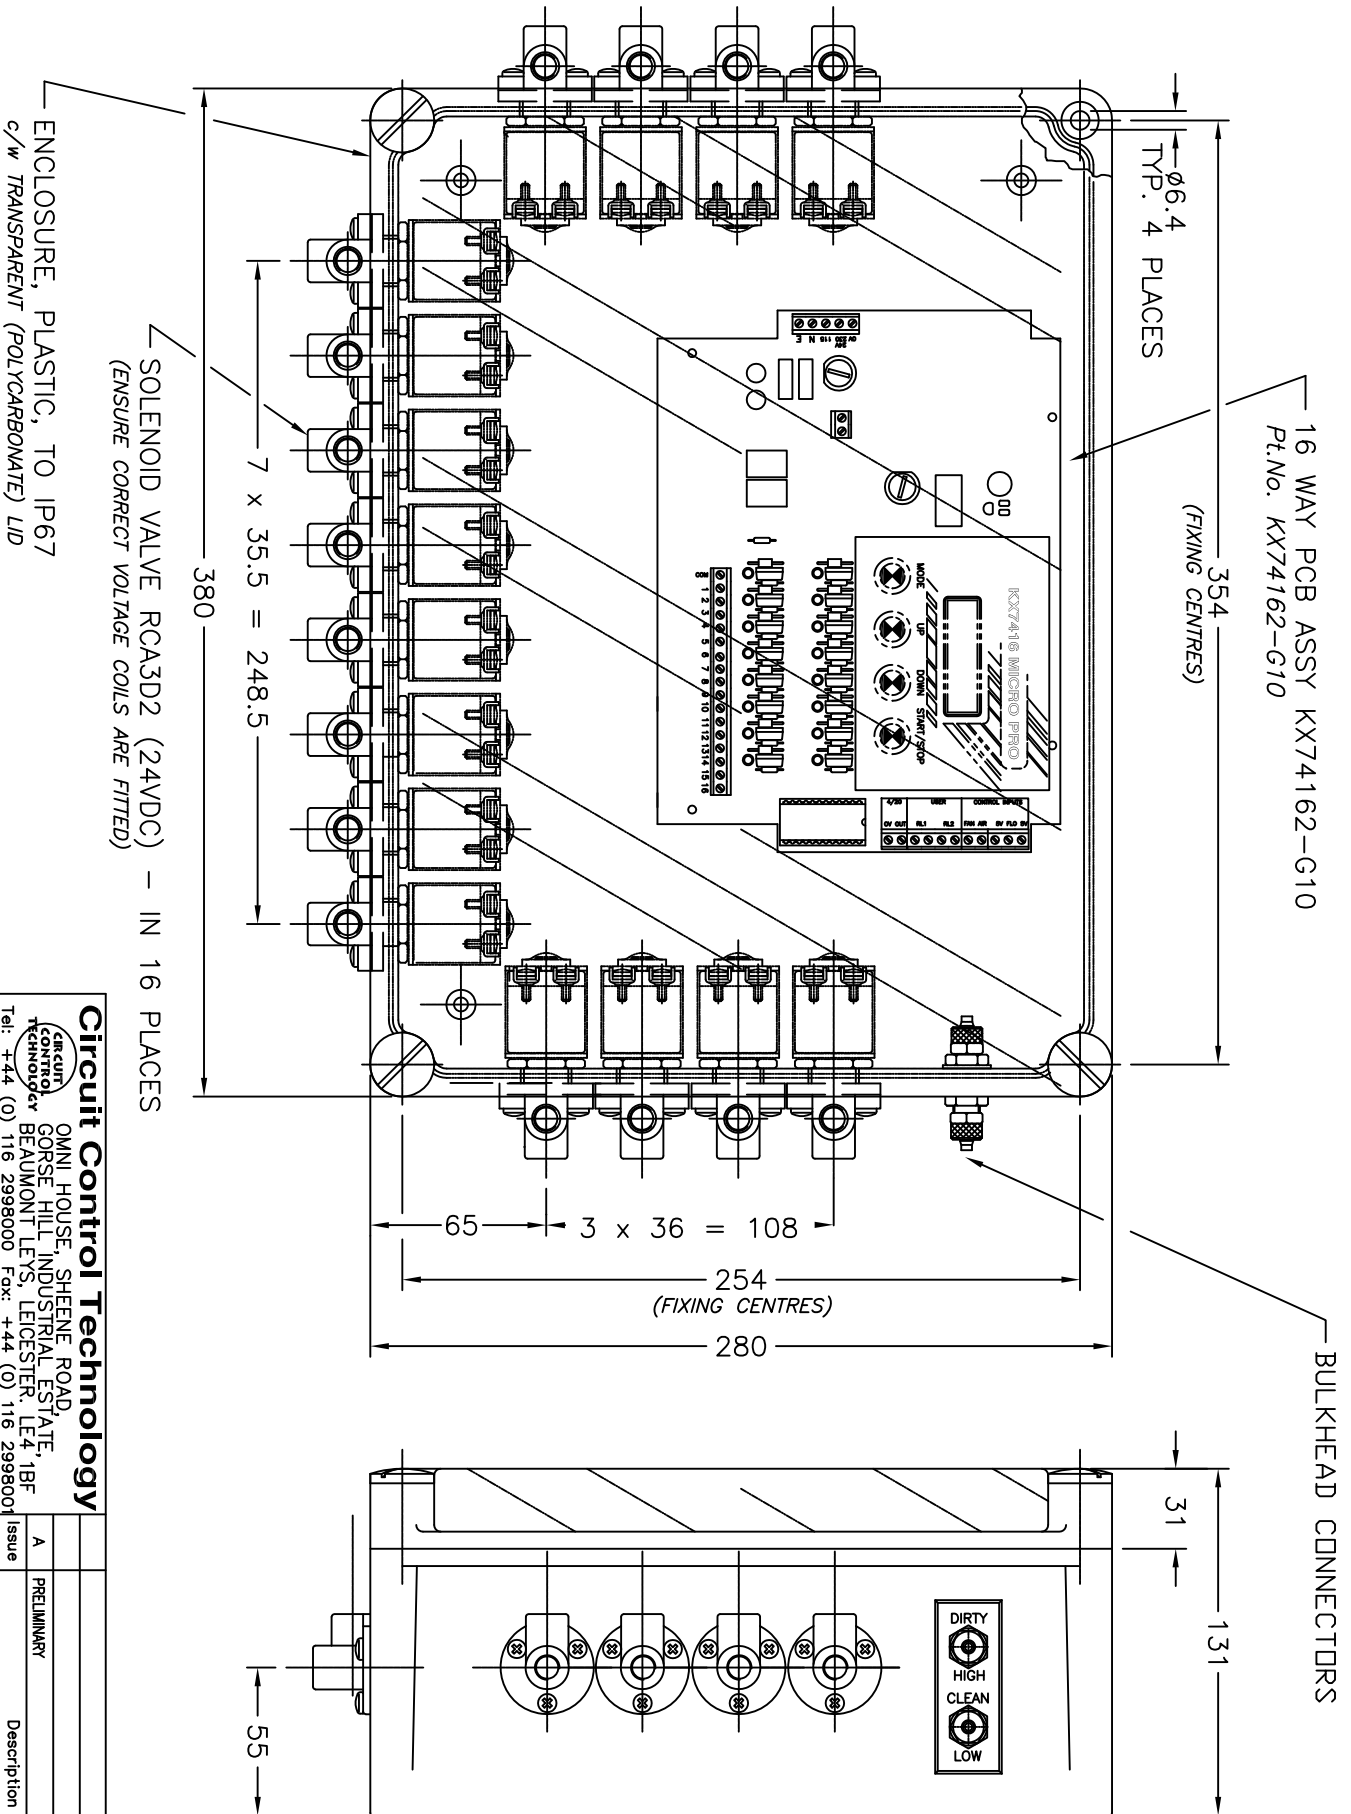

Circuit Control Technology OMNI HOUSE, SHEENE ROAD, GORSE HILL INDUSTRIAL ESTATE, BEAUMONT LEYS, LEICESTER, LE4 1BF Tel: +44 (0) 116 2998000 Fax: +44 (0) 116 2998001				
Part No:	16MKX74162-G4R3E7			
Title:	16 VALVES/KX74162-G10/E7 REV JET STATION GENERAL ARRANGMENT			
CADFile:	KX74\RA\KX74162\06A			
Dwg. No.	RJ741621016			
Sheet 1 of 1	Rev. A			
Issue	A	PRELIMINARY	Date	11.07.12
Drwn.	LOF	11.07.12	THIS DRAWING IS THE COPYRIGHT OF CIRCUIT CONTROL TECHNOLOGY AND NOT BE COPIED, TRANSMITTED NOR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS INTENDED, WITHOUT THEIR WRITTEN PERMISSION.	
Appd.			Plot Date:	11.07.12